



Handing Diagram



△ - Indicates the Keyed Door

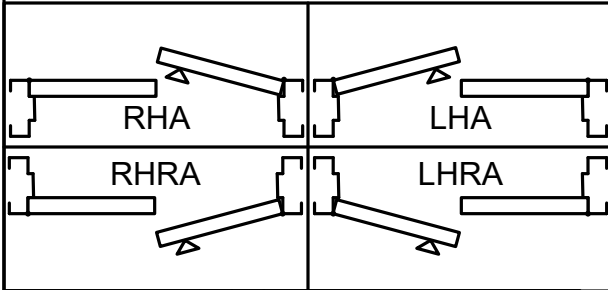

NOTES:

HARDWARE	Y	N	MODEL#
Flushbolts			
Closer		<input type="checkbox"/> Push Side	<input type="checkbox"/> Pull Side
Wall Condition	<input type="checkbox"/> WD Stud	<input type="checkbox"/> Mtl Stud	<input type="checkbox"/> Masonry Size
Drywall Thickness	Inside:		Outside:
Wall Thickness			
Jamb Depth			
Material	Gauge	Type	
CONSTRUCTION	<input type="checkbox"/> New	<input type="checkbox"/> Existing Opening	
Hinges	Size	<input type="checkbox"/> Standard	<input type="checkbox"/> Heavy
Rough Opening			

Hinge locations are from TOP of FRAME to TOP of HINGE

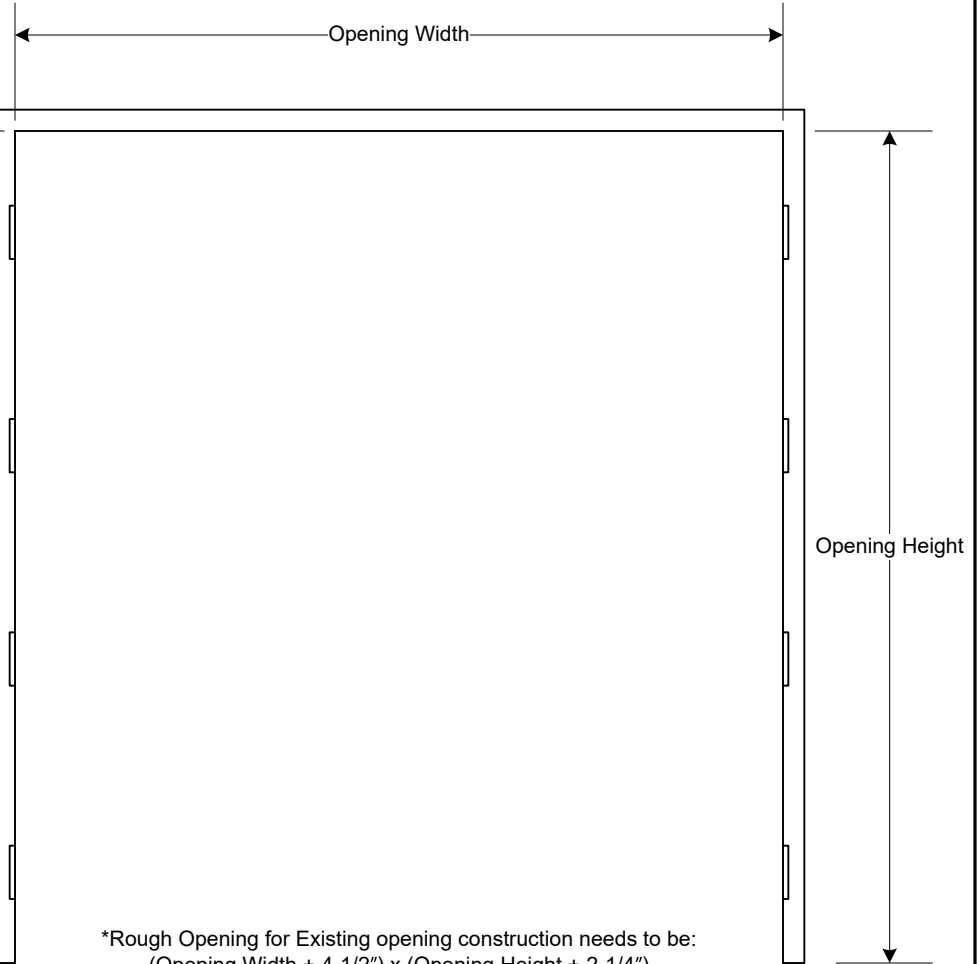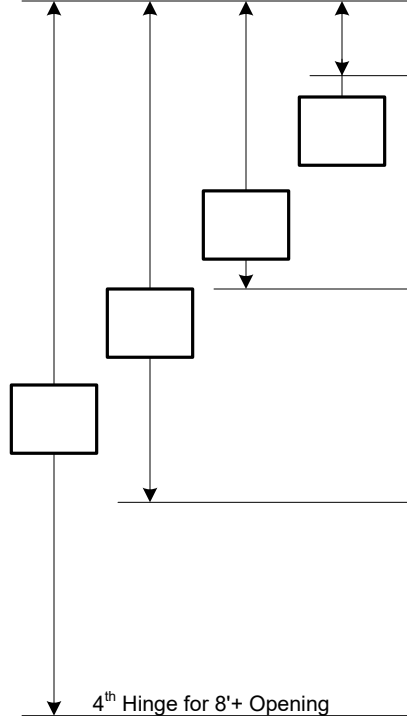

*Rough Opening for Existing opening construction needs to be:
(Opening Width + 4-1/2") x (Opening Height + 2-1/4")

Opening #	Qty	Hand	Opening Size		Door Thickness	Label
			Width	Height		

DETAIL UPDATED 2/15 BY KRIS LAKE

CHOWN HARDWARE | EST 1879
333 NW 16th Ave
Portland, OR 97209

Frame Pair Only

Prepared By:	Quote / Order #
Date:	Drawing #