



Handing Diagram

△ - Indicates the Key Side

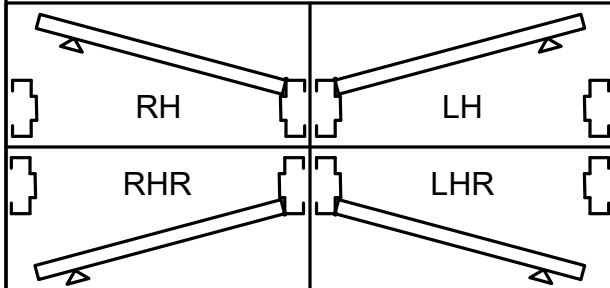


NOTES:

| |
|--|
| |
| |
| |
| |

| | | | |
|-------------------|----------------------------------|---|---------------------------------------|
| HARDWARE | Y | N | MODEL# |
| Deadbolt | | | |
| ASA Strike | | | |
| Closer | | <input type="checkbox"/> Push Side | <input type="checkbox"/> Pull Side |
| Wall Condition | <input type="checkbox"/> WD Stud | <input type="checkbox"/> Mtl Stud | <input type="checkbox"/> Masonry Size |
| Drywall Thickness | Inside: | Outside: | |
| Wall Thickness | | | |
| Jamb Depth | | | |
| Material | Gauge | Type | |
| CONSTRUCTION | <input type="checkbox"/> New | <input type="checkbox"/> Existing Opening | |
| Hinges | Size | Weight | |

| Rough Opening* | | | | | | |
|----------------|-----|------|--------------|--------|----------------|-------|
| Opening # | Qty | Hand | Opening Size | | Door Thickness | Label |
| | | | Width | Height | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

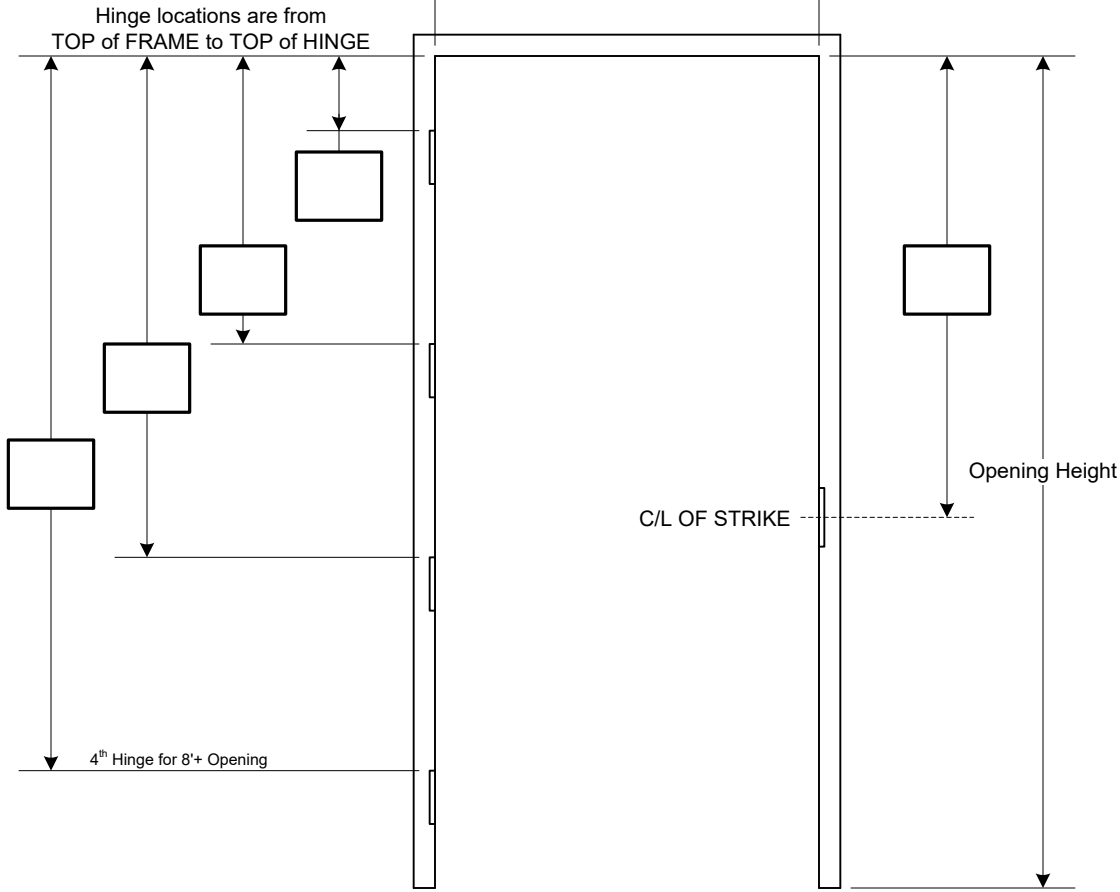

*Rough Opening for Existing opening construction needs to be:
 (Opening Width + 4-1/2") x (Opening Height + 2-1/4")

DETAIL UPDATED 2/15 BY KRIS LAKE



333 NW 16th Ave
 Portland, OR
 97209

Single Frame Only

| | |
|--------------|-----------------|
| Prepared By: | Quote / Order # |
| Date: | Drawing # |